
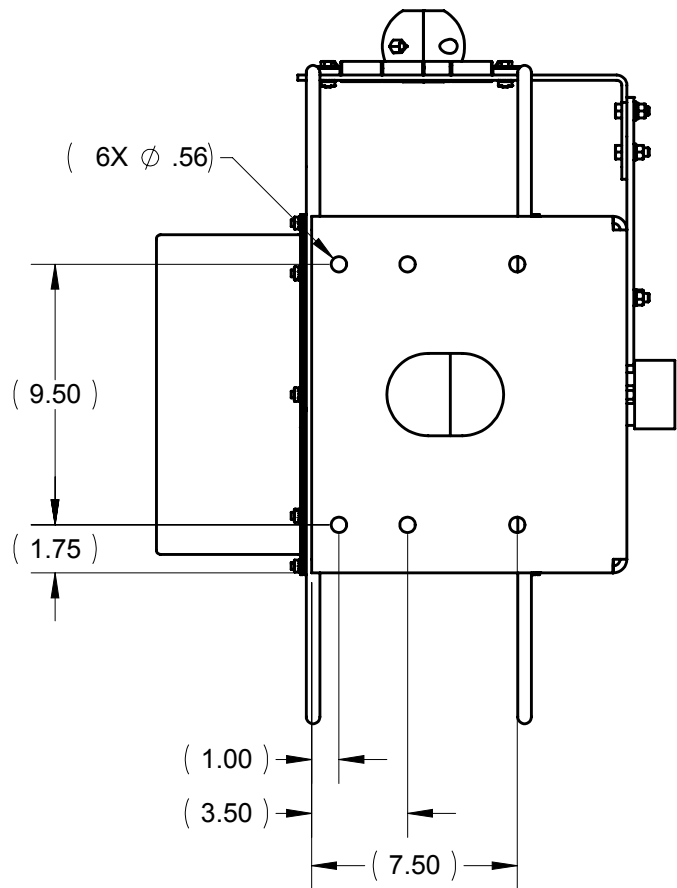
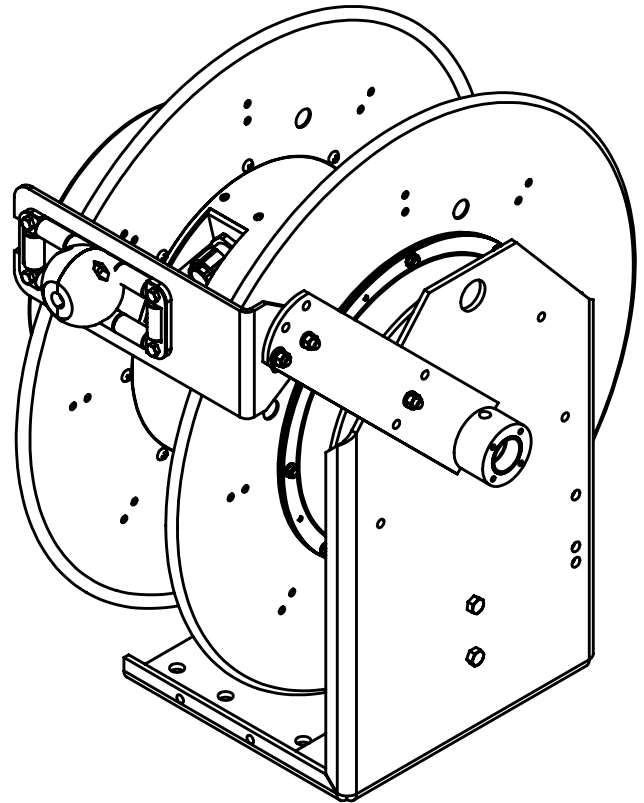
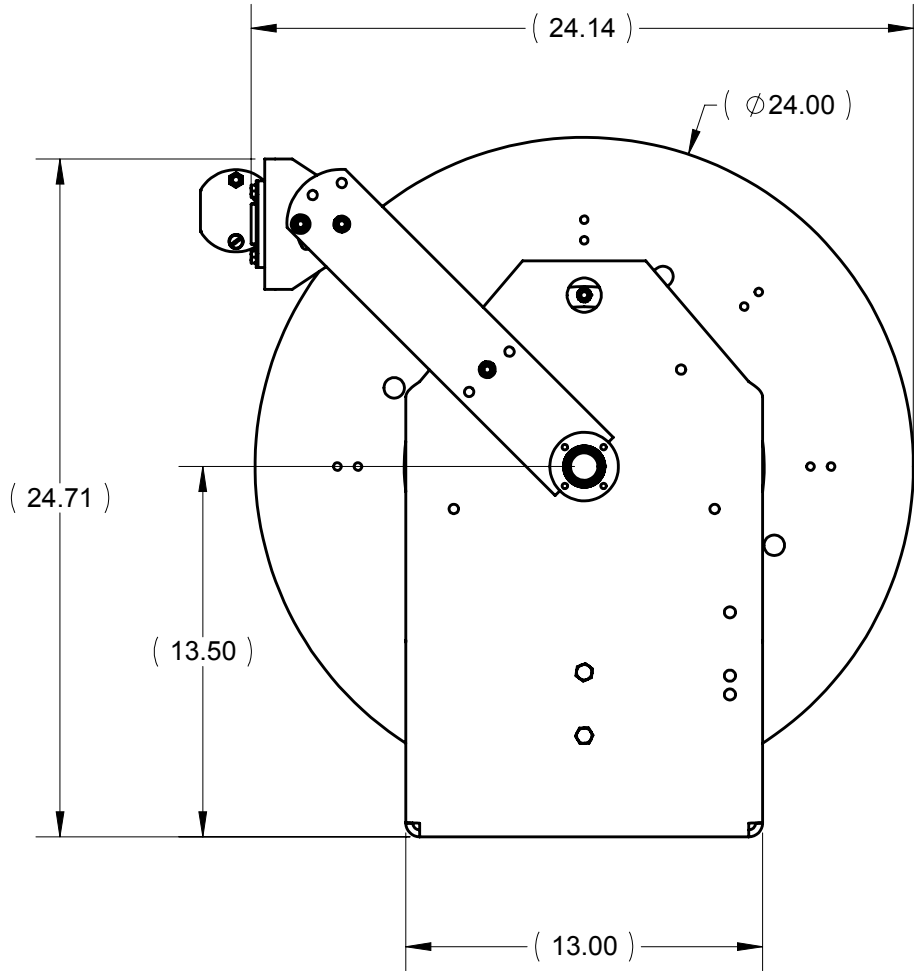


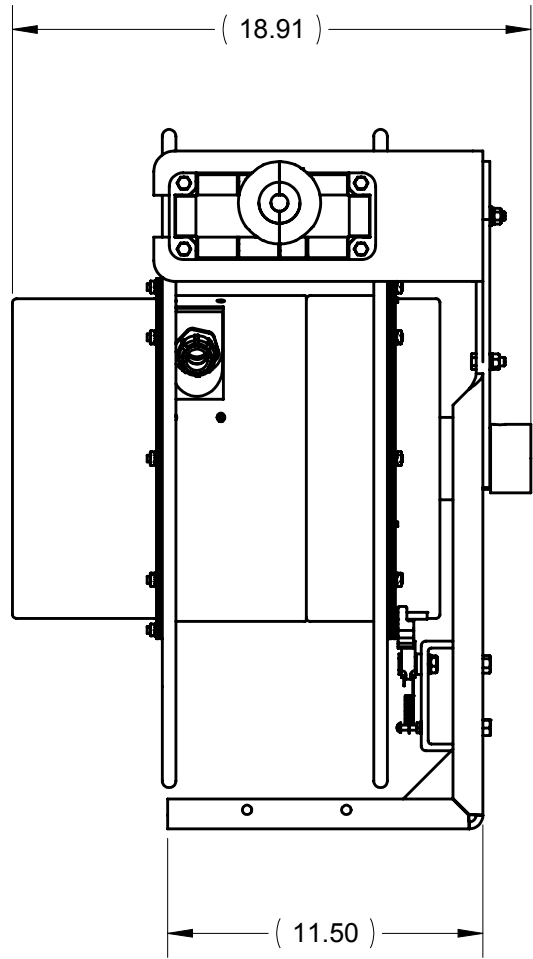

- NOTES:
- REEL SIZED TO LIFT/DRAK 60FT OF #6AWG 3C TYPE G-GC CABLE.
 - SLIP RING: 75AMP, 3 COND., 600V. + 35AMP 3 COND., 600V

15	XA-40248-1	SPRING MOTOR PARALLEL E	1	PC
14	XA-40255	SPOOL ASSY 24 X 7 2400 SER	1	PC
13	XA-RA-E03D03-PR	SLIP RING 1.5B 75A 3C+35A 3C 42IN LEADS	1	PC
12	XA-40251A	RATCHET ASSY 19/2400 E&L SPRINGS	1	PC
11	XA-962100	MANUAL 1900/2400 POWERREEL	1	PC
10	XA-42297	JUMPER WIRE 10AWG 19/2400 REELS	1	PC
9	XA-40257A	GUIDE ARM ASSY 2400 7.5IN E/L	1	PC
8	XA-40233	GASKET SPONGE 13.120 OD X 11.880 ID	1	PC
7	XA-40203	FRAME ASSY 2400 COMPLETE PDRCYEL	1	PC
6	XA-40232-P	COVER CR 5.2LG 19/24 PDRCYEL	1	PC
5	XA-03558	CABLE LUG 6 AWG STRANDED 10 STUD INS	3	PC
4	XA-100390	CABLE LUG 12-10 AWG INS 10 STUD	3	PC
3	XA-101057	CABLE KIT .875-1.00 19/2400	1	PC
2	XA-536455	CABLE 6AWG 3C TYPE G-GC	67.00	FT
1	XA-533328	BALL STOP .44-1.38 OD CBL (ROUND)	1	PC

STATUS: RELEASED		DESCRIPTION: REEL PR PKEP-D-E03D03 L/D 60FT 6/3		
ER NO.	51817	INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5-1994 UNLESS OTHERWISE SPECIFIED PRIMARY UNITS ARE IN INCH POUND SECONDS SECONDARY UNITS IN MILLIMETERS KILOGRAMS SECONDS TOLERANCES ARE AS FOLLOWS DECIMAL = X.X ± 0.1 IN (2.5 MM) X.XX ± 0.03 IN (0.8 MM) X.XXX ± 0.010 (0.25 MM) ANG. ± 1° FRAC. ± 1/16 THREAD CLASS: 2 CAD SYSTEM: SOLIDWORKS MINIMUM MACHINED SURFACE 250		
ER DATE:	12/06/2011			
ER ENGR:	S WEAVER			
ER APPR:	D SAMPSON			
DRAWN:	S WEAVER	12/06/2011	MATERIAL NO. 2	
APPR:	D SAMPSON	12/06/2011	XA-244060306011	
SIZE B		SCALE: 1:7	WEIGHT(REF): 143.58 LB	REV 0
		MAT'L:		SHEET 1 OF 1