
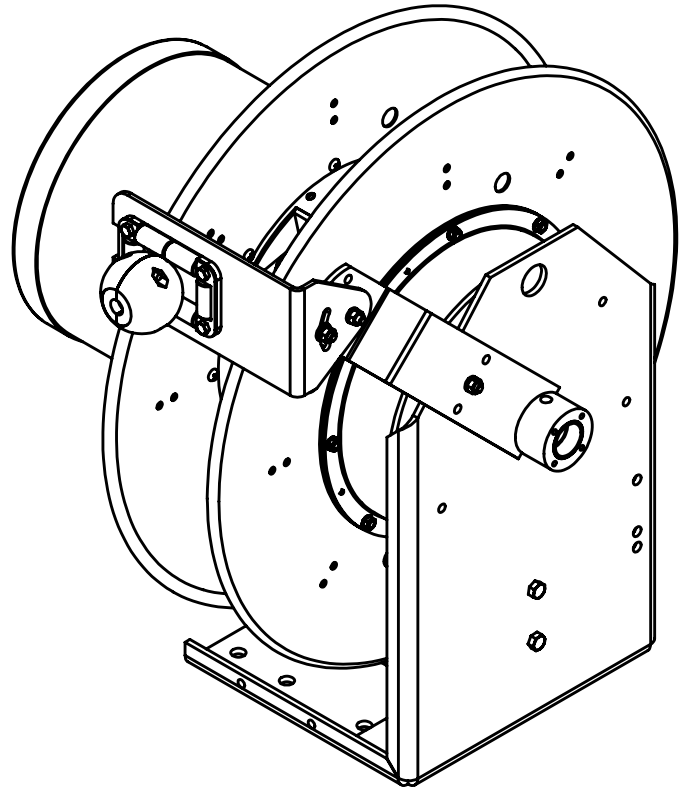
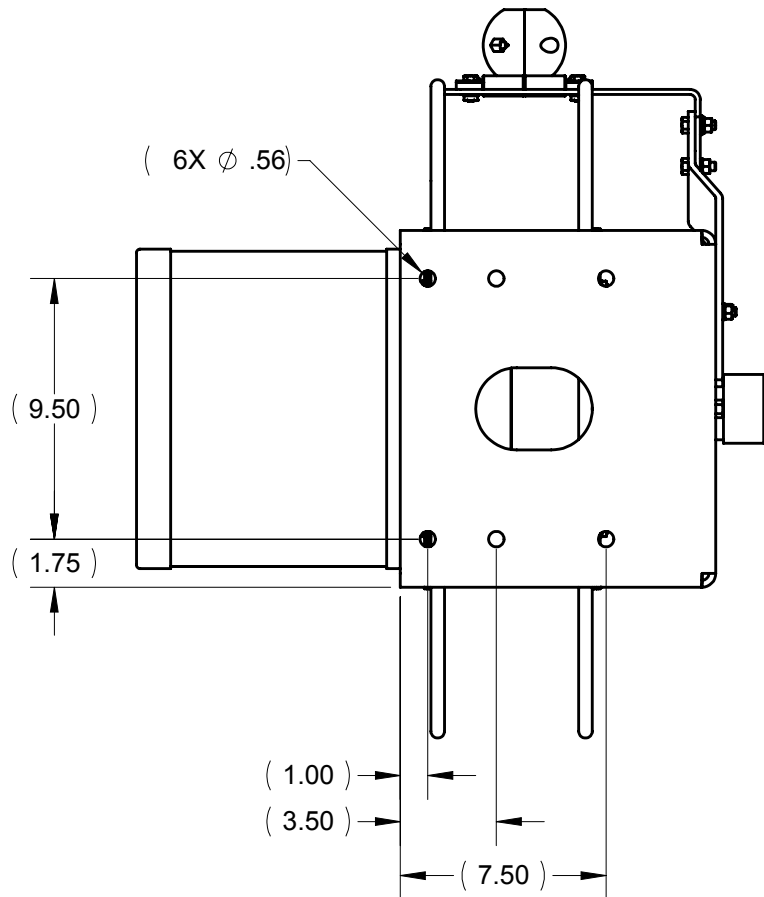
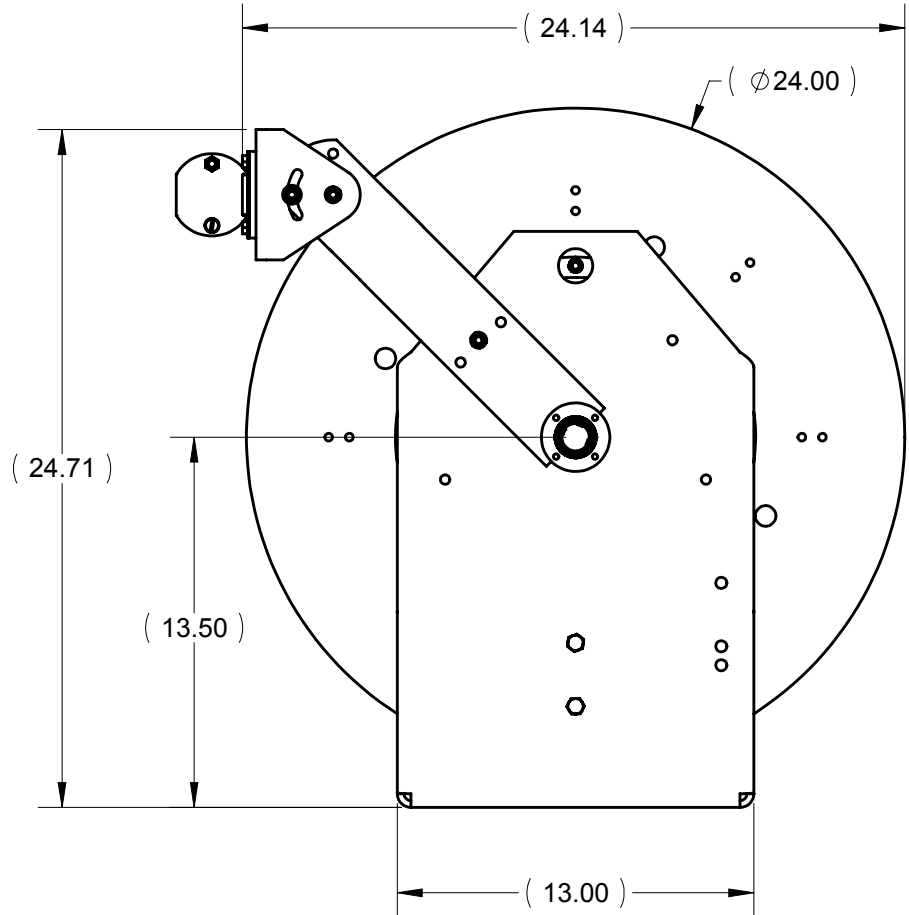


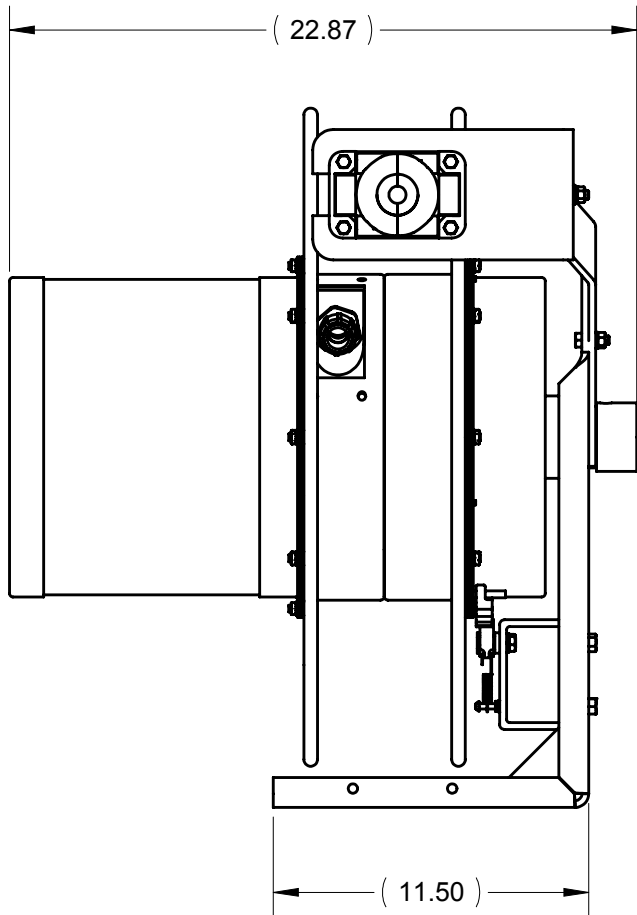

- NOTES:
1. REEL SIZED TO LIFT/DRAK 30 FT OF #4AWG 3C TYPE W CABLE.
 2. SLIP RING: 110 AMP., 3 COND., 600V.

14	XA-40277	SPRING MOTOR 2.50IN SGL	1	PC
13	XA-40254	SPOOL ASSY 2400 24 X 5.1 X 11. 9	1	PC
12	XA-RA-F03	SLIP RING 1.5B 110A 3C	1	PC
11	XA-40251B	RATCHET ASSY 19/2400 F SPRING	1	PC
10	XA-962100	MANUAL 1900/2400 POWERREEL	1	PC
9	XA-42297-75	JUMPER WIRE 10AWG 19/2400 75 AMP	1	PC
8	XA-40258C	GUIDE ARM ASSY 2400 5IN F SPRING	1	PC
7	XA-40233	GASKET SPONGE 13.120 OD X 11.880 ID	1	PC
6	XA-40203	FRAME ASSY 2400 COMPLETE PDRCYEL	1	PC
5	XA-40268	COVER CR 10.50 LG 19/24 PDRCYEL	1	PC
4	XA-04255	CABLE LUG 4 AWG WLD .25 STUD	3	PC
3	XA-101058	CABLE KIT 1.065-1.205 19/2400	1	PC
2	XA-33065	CABLE 4AWG 3C TYPE W	37.00	FT
1	XA-533328	BALL STOP .44-1.38 OD CBL (ROUND)	1	PC
ITEM	MATERIAL NO. 2		DESCRIPTION	QTY. UNIT

STATUS: RELEASED		DESCRIPTION: REEL PR PGF-E-F03 L/D 30FT 4/3	
ER NO.	51774	INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5-1994 UNLESS OTHERWISE SPECIFIED PRIMARY UNITS ARE IN INCH POUND SECONDS SECONDARY UNITS IN MILLIMETERS KILOGRAMS SECONDS TOLERANCES ARE AS FOLLOWS DECIMAL: X.X ± 0.1 IN (2.5 MM) X.XX ± 0.03 IN (0.8 MM) X.XXX ± 0.010 (0.25 MM) ANG. ± 1° FRAC. ± 1/16 THREAD CLASS: 2 CAD SYSTEM: SOLIDWORKS MINIMUM MACHINED SURFACE: 250/	
ER DATE:	12/1/2011		
ER ENGR:	S WEAVER		
ER APPR:	D SAMPSON		
DRAWN:	S WEAVER	12/1/2011	DRAWING NO. 2: XA-243040303011
APPR:	D SAMPSON	12/1/2011	
SIZE B		SCALE: 1:7	WEIGHT(REF): 124.28 LB
		MAT'L:	

10102 F Street
Omaha, NE 68127
800-521-4888



REV
0