


NOTES:

1. ENCLOSE THIS DRAWING WITH PENDANT.
2. IF PRE-WIRING REQUESTED:
 - a. STRIP APPROX. 12 INCHES OF JACKET OFF OF ONE END OF SPECIFIED CABLE.
 - b. FEED CABLE THROUGH CORRECT SIZE BUSHING, COLLAR AND HOUSING. SECURE IN PLACE.
 - c. CUT EACH WIRE TO APPROXIMATE LENGTH (NOT SHORTER THAN 6 INCHES) NEEDED TO ROUTE WIRE TO CORRECT TERMINAL ON SWITCH. ATTACH TERMINAL RING, ROUTE WIRE TO TERMINAL ON SWITCH AND ATTACH USING SCREW PROVIDED WITH SWITCH.
 - d. DO NOT CUT EXTRA WIRES (IF ANY) ANY SHORTER THAN 6 INCHES OR THE LENGTH OF THE CASE, WHICH EVER IS LONGEST.
 - e. CLOSE AND SECURE CASE.
3. SEE MANUAL FOR STRAIN RELIEF INSTALLATIION IF ONE IS REQUIRED PER ORDER.
4. SEND ALL EXTRA PARTS WITH PENDANT.


GREEN BOOT

RED BOOT

SWITCH
SCHEMATIC

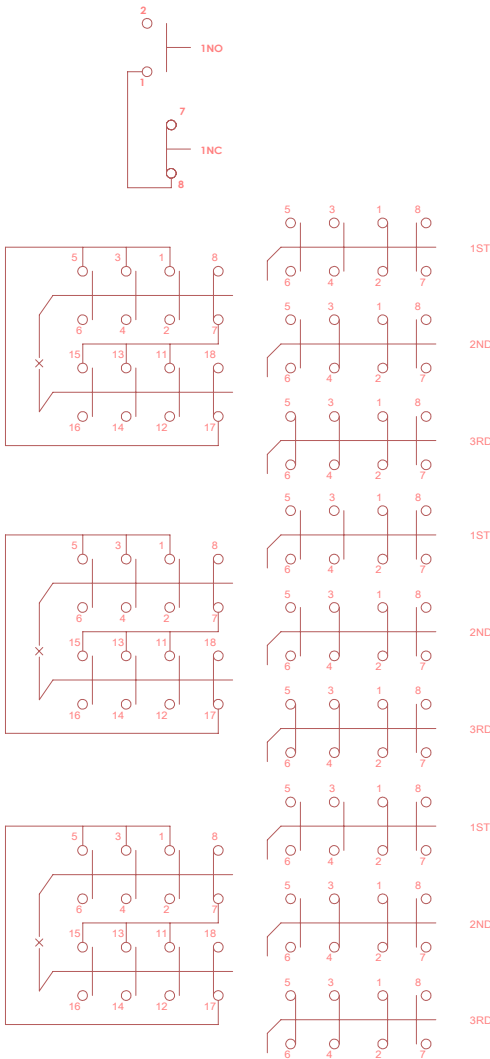

SWITCH ASSEMBLY
VIEWED FROM
BACK SIDE

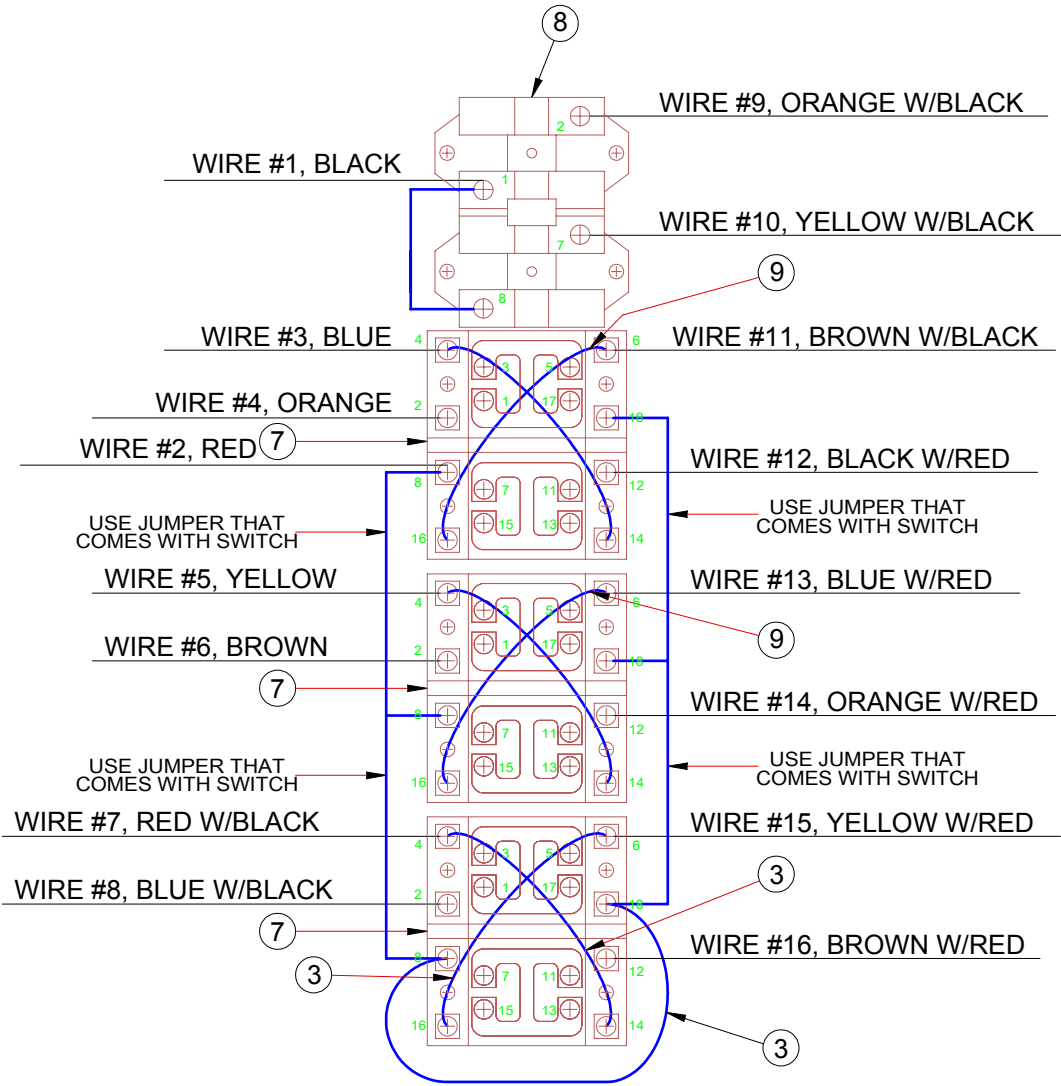

9	XA-PEN1081	WIRE JMPR 18AWG 10.0 LG BLK FLAG TERM	4	PC
8	XA-34308	SWITCH MOM ON-OFF 1NC 1NO KITTED	1	PC
7	XA-34323	SWITCH 3 SPD 2NC 6NO INTERLOCK KIT	3	PC
6	XA-35373	STICKER WARNING PNDNT	1	PC
5	XA-PEN1077	STICKER UL FOR 80 SERIES PNDNT	1	PC
4	XA-960400	MANUAL PNDNTS 80 SERIES	1	PC
3	XA-36277	JUMPER WIRE PNDNT 6.0 LG BK	3	PC
2	XA-34281	ENCLOSURE 8 BTN DEEP BACK ABS PLSTC	1	PC
1	XA-07853	CABLE LUG 22-18 AWG 10 STUD	18	PC
ITEM	MATERIAL NO. 2	DESCRIPTION	QTY.	UNIT

STATUS: RELEASED	DESCRIPTION: PENDANT 8-BTN (3) TRPL SPD MOM ON/OFF
ER NO. 50851	INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5-1994
ER DATE: 09/14/2011	UNLESS OTHERWISE SPECIFIED PRIMARY UNITS ARE IN INCH POUND
ER ENGR: K COCHRAN	SECONDS SECONDARY UNITS IN MILLIMETERS KILOGRAMS SECONDS
ER APPR: M MACDONALD	TOLERANCES ARE AS FOLLOWS
DRAWN: K COCHRAN 09/21/2005	DECIMAL: X.X ± 0.1 IN (2.5 MM) X.XX ± 0.03 IN (0.8 MM) X.XXX ± 0.010 (0.25 MM)
APPR: T BIELFELT 09/27/2005	ANG: ± 1° MINIMUM MACHINED SURFACE 250/
FRAC: ± 1/16	THREAD CLASS: 2
SIZE B	SCALE: 1:2
WEIGHT(REF): 1.66 LB	MAT'L:
SHEET 1 OF 1	