

Common 1400 Series PowerReel® Options

Pivot Base




The Pivot Base allows reels to rotate up to 345 degrees left-to-right. The unit bolts to the base of the reel in the field (see page 24 for more details). Also fits 1200 Series reels.

Part No.	Wt lb (kg)
PVB	7.5 (3.41)

For 360° Swivel Base, see page 25

Cord/Cable Grips

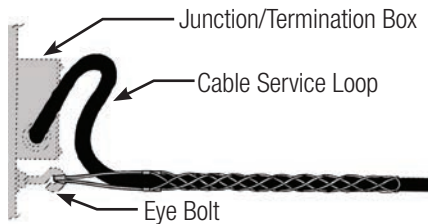

Cable Grips (or Kellems Grips) relieve the concentrated strain at the cable termination point, thereby increasing cable life. Grips are recommended for all applications. In most installations, the eye of the cable grip is connected to an eye bolt or U-bolt. Allow for a cable service loop to minimize the strain on the cable.

Part No.	Description
03622	Cable grip for cable O.D. ranges 0.430" to 0.610"
03623	Cable grip for cable O.D. ranges 0.611" to 0.740"
03624	Cable grip for cable O.D. ranges 0.741" to 0.990"
03625	Cable grip for cable O.D. ranges 0.991" to 1.24"
03626	Cable grip for cable O.D. ranges 1.25" to 1.49"

Incandescent Hand Lamp



The HSR has a high impact yellow handle with recessed on/off switch and 15 amp, 125 volt outlet on the side. Features a grounded steel reflector cage with swivel hanger. Accepts up to 14/3 SJ00W-A cable. 100-watt rough service bulb not included.

UL listed for indoor use.

Part No.	Wt lb (kg)
HSR	1.3 (0.59)

Fluorescent Hand Lamp




The FHL has rubber handles with switch and hanger. Features a plastic non-glare shield with cool operating 13-watt lamp (included). Ballast is mounted on the feeder cord. For use with 16 or 14 AWG 3 conductor SJ00W-A cable only.


UL listed for indoor use.

Part No.	Wt lb (kg)
FHL	1.2 (.55)

Flop-Over Guide Kit

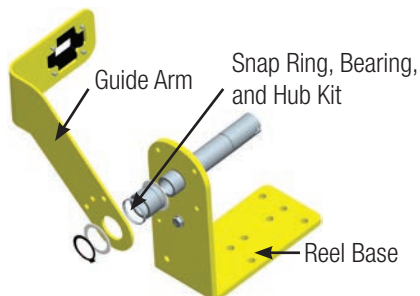

The Flop-Over Guide Kit consisting of special hub, snap ring, and bearings. The kit modifies the standard stationary guide arm to let it freely pivot around the shaft hub. Ideal for overhead reels that require a back and forth payout. Only for 1400 Series.



Part No.	Wt lb (kg)
FGK	n/a

Receptacle Boxes - see page 23.

Ball Stops - see page 21.