


# Ball Stops and Cable Grips


## Ball Stops



Type A - Round with spring

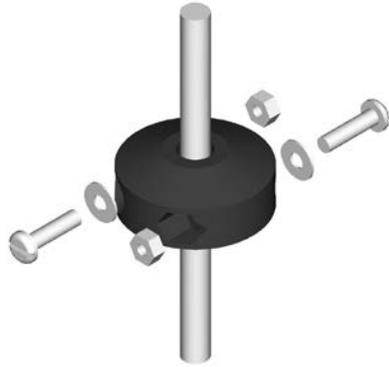

Type B - Split Donut

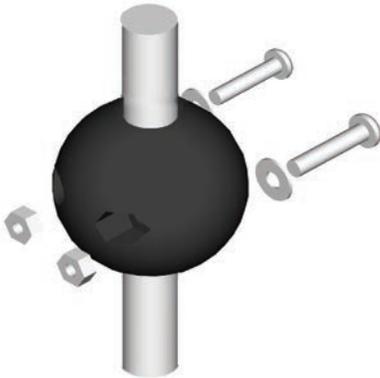


Type C - Split Round

Ball Stops, also referred to as “Cable Stops” or “Bumper Stops” are:

- Generally used for manually operated “Lift/Drag” applications govern retraction length. Stops are required when cable-end accessories such as hand lamps and receptacle boxes are installed on the reels.
- Ball stops are included with all 1200 Series reels.
- Ball stops are included on 1400, 1500, 1900, 2400 and 2500 Series reels “Lift/Drag” application only.

Type	For Outside Cable Dia of: inches (mm)	For Reel Series:	Part No.
A	0.19 to 0.44 (4.8 to 11.2)	1200 or 1400 only <b>Not for 1500</b>	<b>34885</b>
B	0.44 to 0.62 (11.2 to 15.7)	Any	<b>34474</b>
B	0.63 to 0.75 (16.0 to 19.1)	Any	<b>34475</b>
B	0.75 to 1.05 (19.1 to 26.7)	Any	<b>34476</b>
C	0.44 to 1.38 (11.2 to 35.0)	Any	<b>533328-K</b>

## Cable Grips

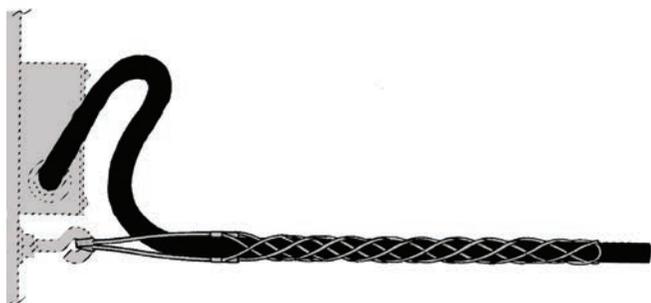

Also referred to as “Kellems” grips, these devices are recommended to maximize cable life. They relieve the concentrated strain on individual conductors at the cable termination point. In most installations, the eye of the cable grip is connected to an eye bolt or U-bolt. This allows free movement between the cable and the grip. Include a generous cable loop to minimize the strain on the cable.

**Strongly Recommended** for “stretch” applications - see page 4.

For Outside Cable Dia of: inches (mm)	Part No.
0.43 to 0.61 (10.9 to 15.5)	<b>03622</b>
0.61 to 0.74 (15.5 to 18.8)	<b>03623</b>
0.74 to 0.99 (18.8 to 25.1)	<b>03624</b>
0.99 to 1.24 (25.1 to 31.5)	<b>03625</b>
1.25 to 1.49 (31.8 to 37.8)	<b>03626</b>