

Safe-Lec 2 End Caps & Pick Up Guides



End Caps

End Caps are insulated covers installed at the ends of the conductor system. Transfer Caps transfer the collectors across switch gaps up to 0.40" (10mm) wide.

Transfer Cap Tolerances

Vertical tolerance $\pm 0.20"$ (5mm)

Horizontal tolerance $\pm 0.08"$ (2mm)

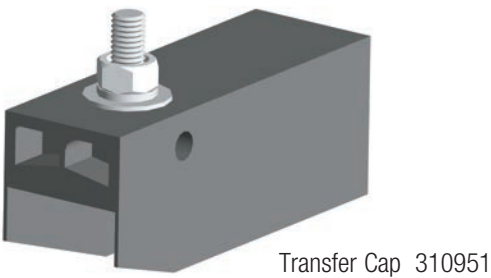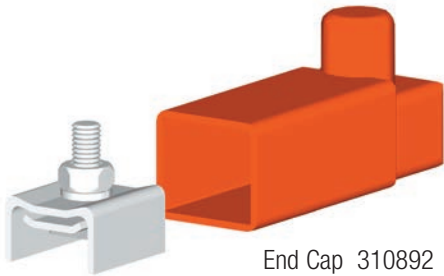


TYPE	Material	Part No.	Wt lb (kg)
End Cap Steel / Copper Bar	PVC	310892	0.07 (0.03)
End Cap Aluminum Bar	PVC	310893	0.05 (0.02)
Transfer Cap	Polycarbonate	310951	0.24 (0.11)

Pick Up Guides

Pick-up Guides are used on discontinuous systems to guide collectors on and off the conductors. Special collectors are required for systems where pick up guides are fitted - see Pg. 22. Guide housing is black painted steel. Guide surfaces are PVC. Molded guides are Polycarbonate.

Not recommended for lateral mounting

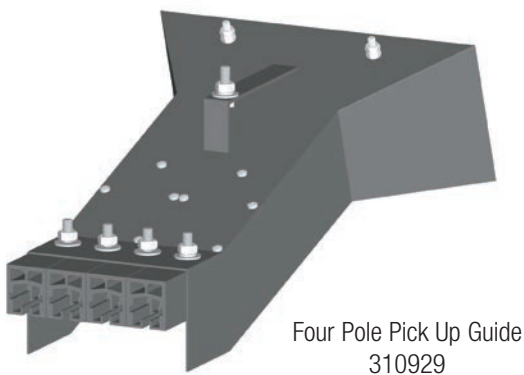

TYPE	Part No.	Wt lb (kg)
Single Pole	310920	2.8 (1.27)
Three Pole	399502	4.6 (2.10)
Four Pole	310929	5.6 (2.54)

