


# Safe-Lec 2 Conductor Flange Brackets

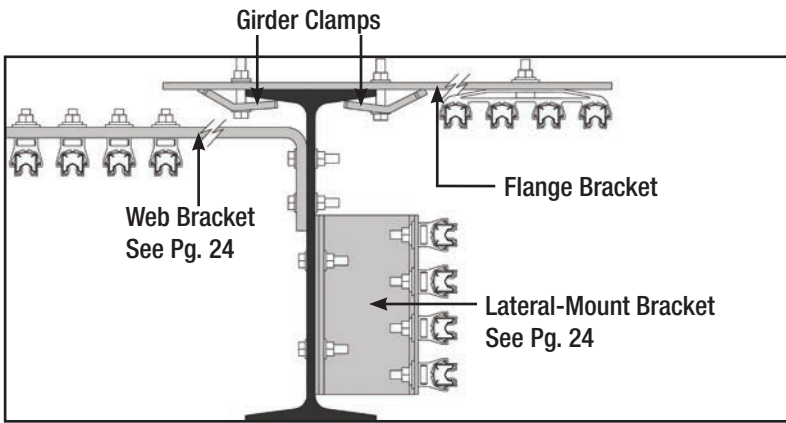


Example Bracket Installations

The various mounting brackets shown on this page and Pg. 24 are used to mount Safe-Lec 2 in many different configurations to suit the application. The diagram shown at the left illustrates how the various brackets are mounted to the I-beam. **All brackets are zinc plated unless noted otherwise.**

### Recommended Max. Bracket Spacing

Application	Collectors Coming Into	Spacing
Vertical Entry	Bottom of rail	59.0" (1.500 M)
Lateral Entry	Side of rail	44.3" (1.125 M)
Curves	Bottom of rail	44.3" (1.125 M)

## Single-sided Flange Brackets

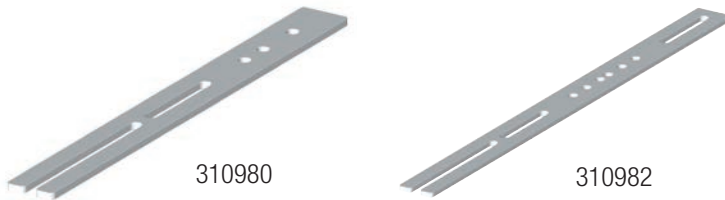

For Beam Flange:	Part No.	Wt lb (kg)
3.15" to 6.10" (80 to 155 mm)	<b>310980</b>	1.415 (0.64)
6.10" to 12.01" (155 to 305 mm)	<b>310982</b>	1.945 (0.88)

## Double-sided Flange Brackets



For Beam Flange:	Part No.	Wt lb (kg)
3.15" to 7.28" (80 to 185 mm)	<b>310981</b>	1.805 (0.82)
7.28" to 12.01" (185 to 305 mm)	<b>310983</b>	2.37 (1.08)

## Girder Clamp



Two required with each flange bracket.

Part No.	Wt lb (kg)
<b>51142</b>	0.255 (0.12)