

Hevi-Bar II - 1500A DURA-COAT & Hangers

DURA-COAT Conductor Bar & Components

The ideal option for highly corrosive environments Splices are pre-installed on Dura-Coat conductors.

Type / Max Temp.	Use (Color)	Conductor Bar	Conductor Bar Cut Lgth (Specify 5 to 29 ft)	Expansion Section	Splice Cover	Power Feed	Power Interrupting Section ♦	End Cover
PVC 160° F	Phase / Indoors (Orange)	50734-J	51382-J	50742-J	51297	50227	50762-J	33796B
	Phase & Ground / Outdoors UV Stable (Black)	50734B-J	50230-J	50742B-J	51297	50227	50762B-J	33796B
Poly - carbonate 250°F	Phase & Ground / Indoors & Outdoors (Red)	39430-J	39430-J	50060-J	51297B	50227C	50763-J	33796B
Wt lb (m)		97 (44)	3.23 lb/ft (1.46 kg/m)	72 (36.65)	1.41 (0.64)	130 (58.97)	126 (57.15)	1.5 (0.68)
Length ft (m)		30.0 (9.144)	-	20.0 (6.10)	/	/	30.0 (9.144)	/

♦ See Appendix IV Pgs. 63-64.

Hangers

Hangers can be installed on brackets up to 1/2" thick (12.7mm).



Polycarbonate Snap-In



Polycarbonate Snap-in w/Insulator

Hangers - Used with 700 to 1500A Bar	Plated Hardware	Stainless Steel Hardware	High Temp.	Wt lb (kg)
Polycarbonate Snap-In	23223	28220	N/A	0.28 (0.127)
Polycarbonate Snap-in w/insulator	24902	24902B	N/A	0.87 (0.395)
Stainless Steel Cross Bolt	25986	28374	51972	0.61 (0.277)
Stainless Steel Cross Bolt w/insulator	51971	32807	24973	1.16 (0.526)

Anchor Pin


Anchor Pin	Part No.	Wt lb (kg)
Anchor Pin (2 Req'd Per Hanger to turn a hanger into an anchor)	23946	.1 (0.05)



Stainless Steel Cross Bolt



Stainless Steel Cross Bolt w/Insulator

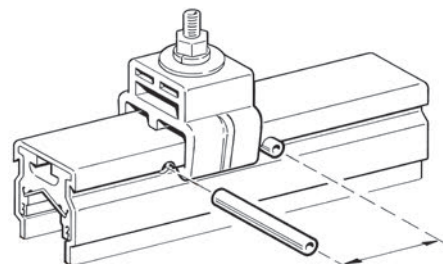

Anchor Pin 23946 (Two Shown)