

Hevi-Bar II - 500A DURA-COAT & Hangers

DURA-COAT Conductor Bar & Components

The ideal option for highly corrosive environments. Splices are pre-installed on Dura-Coat conductors.

Type / Max Temp.	Use (Color)	Conductor Bar	Conductor Bar Cut Lgth (Specify 5 to 29 ft)	Expansion Section	Splice Cover	Power Feed	Power Interrupting Section ♦	End Cover
PVC 160° F	Phase / Indoors (Orange)	39745-J	39747-J	39741-J	51304	37674	50749-J	27588
	Ground / Indoors (Green)	39745G-J	51861-J	39741G-J	51304	37674	N/A	27588
	Phase & Ground / Outdoors UV Stable (Black)	39745B-J	51367-J	39741B-J	51304	37674	50749B-J	27588
Poly-carbonate 250°F	Phase & Ground / Indoors & Outdoors (Red)	50731-J	51383-J	50741-J	51305	32500	50750-J	27588
Wt lb (kg)		27.0 (12.24)	0.9 lb/ft (0.408 kg/m)	28 (12.7)	0.73 (0.33)	4.0 (1.81)	50 (22.67)	1.0 (0.45)
Length ft (m)		30.0 (9.144)	-	30.0 (9.14)	/	/	30.0 (9.14)	/

♦ See Appendix IV Pgs. 63-64.

Hangers

Hangers can be installed on brackets up to 3/8" thick (9.5mm).



Polycarbonate Snap-In



Polycarbonate Snap-in w/Insulator

Hangers - Used with 500A Bar Only	Plated Hardware	Stainless Steel Hardware	Wt lb (kg)
Polycarbonate Snap-In	26591	28368	0.29 (0.14)
Polycarbonate Snap-in w/Insulator	27483	27780	0.89 (0.40)
Stainless Steel Cross Bolt	27481	27788	0.60 (0.27)
Stainless Steel Cross Bolt w/Insulator	27482	29574	1.14 (0.50)

Anchor Pin


Anchor Pin	Part No.	Wt lb (kg)
Anchor Pin (2 Req'd Per Hanger to turn a hanger into an anchor)	23946	.1 (0.05)



Stainless Steel Cross Bolt



Stainless Steel Cross Bolt w/Insulator

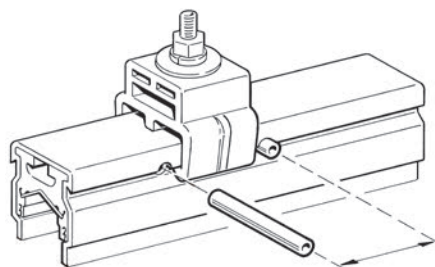

Anchor Pin 23946 (Two Shown)