

Hevi-Bar II - 700A DURA-COAT & Hangers

DURA-COAT Conductor Bar & Components


The ideal option for highly corrosive environments Splices are pre-installed on Dura-Coat conductors.

Type / Max Temp.	Use (Color)	Conductor Bar	Conductor Bar Cut Lgth (Specify 5 to 29 ft)	Expansion Section	Splice Cover	Power Feed	Power Interrupting Section ♦	End Cover
PVC 160° F	Phase / Indoors (Orange)	39847-J	51372-J	50739-J	51320	38117	50751-J	50859
	Ground / Indoors (Green)	39847G-J	51862-J	50739B-J	51320	38117	N/A	50859
	Phase & Ground / Outdoors UV Stable (Black)	39847B-J	51376-J	50740-J	51320	38117	50751B-J	50859
Poly - carbonate 250°F	Phase & Ground / Indoors & Outdoors (Red)	50062-J	51374-J	50063-J	51321	50067	50753-J	50859
Wt lb (kg)		35.0 (15.87)	1.167 lb/ft (0.529 kg/m)	25.0 (11.33)	0.7 (0.31)	5.0 (2.268)	66.0 (29.93)	2.0 (0.907)
Length ft (m)		30.0 (9.114)	-	15.0 (4.57)	1.5 (0.457)	1.5 (0.457)	30.0 (9.114)	1.5 (0.457)

♦ See Appendix IV Pgs. 63-64.

Hangers

Hangers can be installed on brackets up to 3/8" thick (9.5mm).

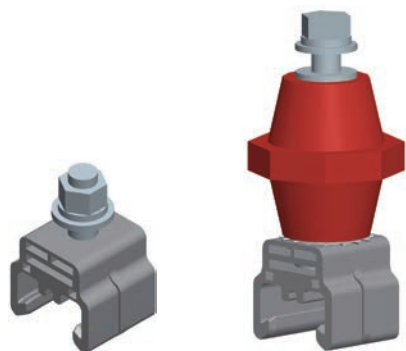


Polycarbonate Snap-In

Polycarbonate Snap-In w/Insulator

Hangers - Used with 700 to 1500A Bar	Plated Hardware	Stainless Steel Hardware	High Temp.	Wt lb (kg)
Polycarbonate Snap-In	23223	28220	N/A	0.27 (0.13)
Polycarbonate Snap-in w/insulator	24902	24902B	N/A	0.83 (0.40)
Stainless Steel Cross Bolt	25986	28374	51972	0.58 (0.28)
Stainless Steel Cross Bolt w/insulator	51971	32807	24973	1.11 (0.53)


Anchor Pin

Anchor Pin	Part No.	Wt lb (kg)
Anchor Pin (2 Req'd Per Hanger to turn a hanger into an anchor)	23946	.1 (0.05)

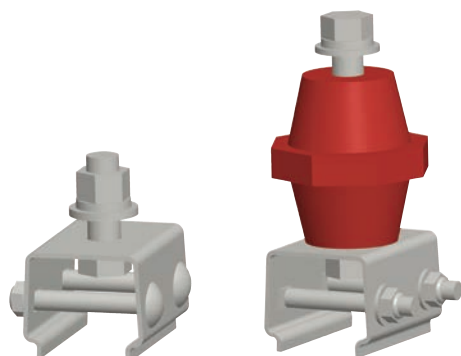

Stainless Steel Cross Bolt

Stainless Steel Cross Bolt w/Insulator

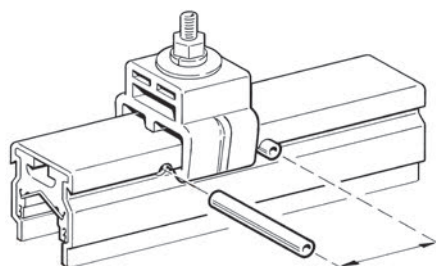

Anchor Pin 23946 (Two Shown)