

Hevi-Bar II - 1000A DURA-COAT & Hangers

DURA-COAT Conductor Bar & Components

The ideal option for highly corrosive environments Splices are pre-installed on Dura-Coat conductors.

Type / Max Temp.	Use (Color)	Conductor Bar	Conductor Bar Cut Lgth (Specify 5 to 29 ft)	Expansion Section	Splice Cover	Power Feed	Power Interrupting Section ♦	End Cover
PVC 160° F	Phase / Indoors (Orange)	50736-J	51377-J	50743-J	51322	38184	50758-J	33796B
	Phase & Ground / Outdoors UV Stable (Black)	50736B-J	51381-J	50743B-J	51322	38184	50758B-J	33796B
Poly - carbonate 250°F	Phase & Ground / Indoors & Outdoors (Red)	50735-J	51379-J	50817-J	534845	38184D	50759-J	33796B
Wt lb (kg)		49 (22.22)	1.63 lb/ft (0.739 kg/m)	40 (18.14)	1.2 (0.54)	6.5 (2.95)	77 (34.92)	1.5 (0.68)
Length ft (kg)		30 (9.114)	*	20 (6.096)	/	/	30 (9.114)	/

♦ See Appendix IV Pgs. 63-64.

Hangers

Hangers can be installed on brackets up to 1/2" thick (12.7mm).



Polycarbonate Snap-In




Polycarbonate Snap-in w/Insulator

Hangers - Used with 700 to 1500A Bar	Plated Hardware	Stainless Steel Hardware	High Temp.	Wt lb (kg)
Polycarbonate Snap-In	23223	28220	N/A	0.28 (0.13)
Polycarbonate Snap-in w/insulator	24902	24902B	N/A	0.87 (0.40)
Stainless Steel Cross Bolt	25986	28374	51972	0.61 (0.28)
Stainless Steel Cross Bolt w/insulator	51971	32807	24973	1.16 (0.53)

Anchor Pin


Anchor Pin	Part No.	Wt lb (kg)
Anchor Pin (2 Req'd Per Hanger to turn a hanger into an anchor)	23946	.1 (0.05)



Stainless Steel Cross Bolt



Stainless Steel Cross Bolt w/Insulator

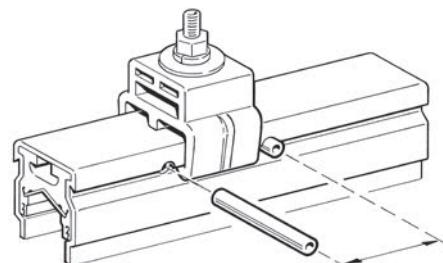

Anchor Pin 23946 (Two Shown)