



In-line Feeds

In-line Feeds with Single Core Cable Entry up to 60A


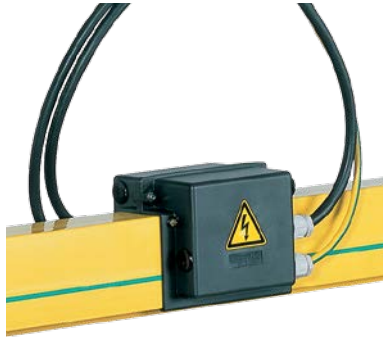


Technical details


- Single core
- 2 separate feedings for 7 pole systems



4/5 poles

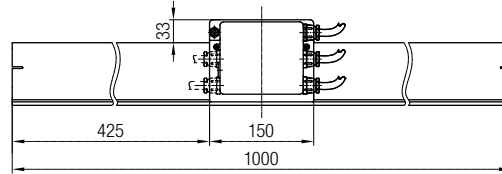


7 poles

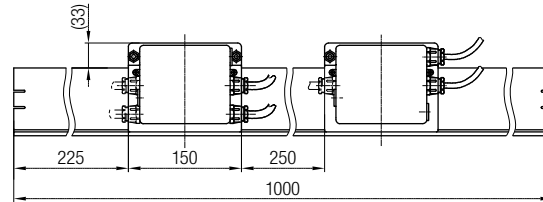

In-line Feeds for System	Poles	Nom. Current [A]	[Pc.]	Feeding L [m]	[mm ²]	Control Feeding [Pc.]	L [m]	[mm ²]	Weight [kg]	Order No.
 CS (continuous strip)	4	up to 60	4	2	10	-	-	-	3.80	084252-040x52
	5		5	2	10	-	-	-	4.30	084252-050x53
	7		4	2	10	3	2	2.5	4.40	084252-070x55
 PL (plug-in type)	4	35	4	2	10	-	-	-	4.20	084252-240x32
	5		5	2	10	-	-	-	4.90	084252-250x33
	7		4	2	10	3	2	2.5	5.45	084252-270x35
	4	60	4	2	10	-	-	-	4.40	084252-240x52
	5		5	2	10	-	-	-	5.20	084252-250x53
	7		4	2	10	3	2	2.5	5.67	084252-270x55
 AN (angle clamping)	7	35	4	2	10	3	2	2.5	5.00	084252-170x35
		60	4	2	10	3	2	2.5	5.40	084252-170x55

L = connection cable length

In-line Feeds Joint Covers AN (Angle Clamping)

In-line Feeds for System AN	Poles	Nom. Current [A]	Feeding			Control Feeding			Weight [kg]	Order No.
			[Pc.]	L [m]	[mm²]	[Pc.]	L [m]	[mm²]		
 AN (angle clamping)	4	up to 60	4	2	10	-	-	-	1.90	084252-140x50
	5		5	2	10	-	-	-	2.50	084252-150x50
	For installation instead of joint cover.									

L = connection cable length